


Ezeemovs2

Compact rear flail mower



professional tractor powered moving equipment

Ezeemows2...

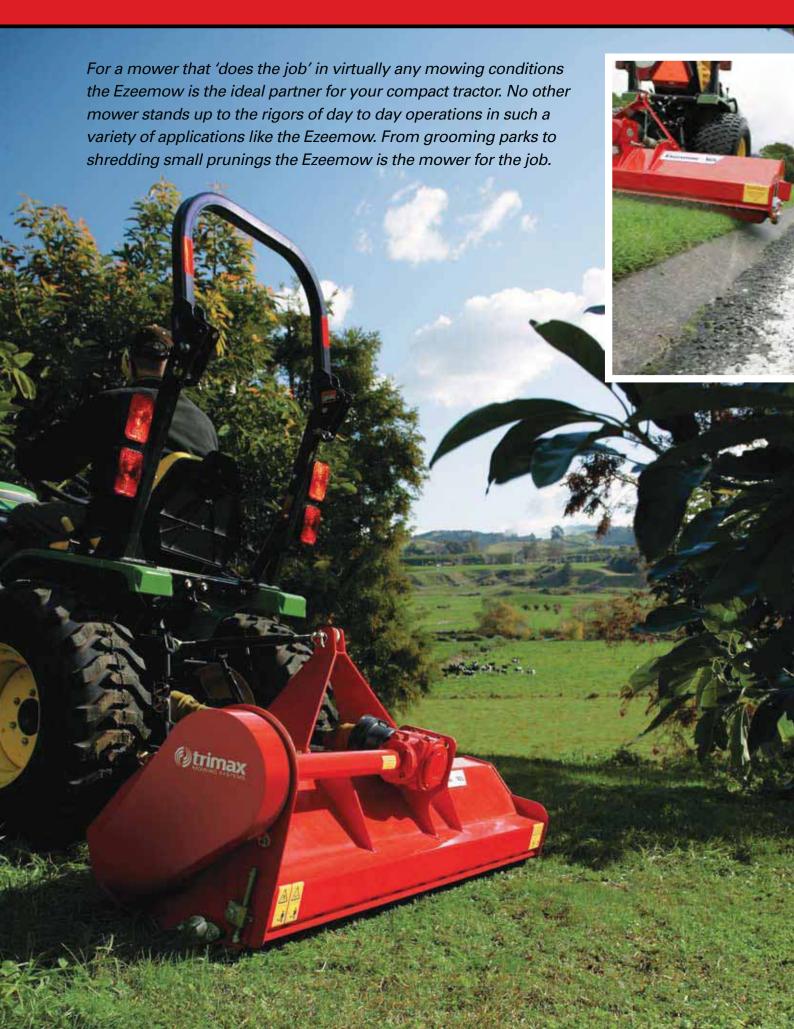

compact versatility ... just add fractor!

The Ezeemow is compatible with tractors from 14 to 45hp and its compact dimensions allow manoeuvrability in tight corners. It can handle fine turf, small prunings and one meter high grass with minimal maintenance and maximum reliability. This versatility makes the Ezeemow ideal for contractors, councils, roadsides, lifestyle blocks, estates and orchards.

Rollers allow the mower to be safely run along kerbs .



Your ideal roadside mowing partner.

Rugged construction

Well thought out design, high strength materials and robust monocoqular construction, ensure the Ezeemow can withstand the harshest conditions and most demanding operators.

Perfect for orchard and lifestyle block mowing.



Stripes fine turf with ease.

Safety first

Safety is of paramount importance when mowing in public areas such as parks, schools and roadsides. This is why Trimax has designed the Ezeemow to expel debris in a downward direction behind the mower.

Power saving blades

The aerodynamic shape of Trimax's unique Gamma™ flails means the tractor's power is used for cutting grass or shredding vegetation, not for pumping air. This equates to lower horsepower requirements, allowing this mower to operate in difficult conditions when powered by a compact tractor. The carefully engineered airflow means all clippings are expelled evenly behind the mower without clumping.



Offset model

Offset versions provide maximum safety whilst mowing along roadside kerbs and drains, and the low profile body enables easy mowing under low hanging vines and trees.

Conveniently fits between horticulture rows.



(A) Three point linkage mounting Dual category linkage pins.

Centre mount option also available (excludes E2 135 model).

B Integral gearbox
Eliminates drive belt idler pulleys.

© Drive belt guard Strong, compact and ventilated.

D Roller bearing protection package Increases bearing life.

(E) Adjustable rear roller Full width.

Domed ends reduce scuffing on turns.

(F) Blades

Trimax exclusive Gamma™ flails.

High mass.

Aerodynamic power-saving design.

	E2 135	E2 155	E2 185
Cutting Width	1.34m (53")	1.50m (59")	1.83m (72")
Overall Width	1.56m (61")	1.72m (68")	2.05m (81")
Approx. Weight	180kg (400lb)	200kg (440lb)	225kg (497lb)
Min Power	12kW (15hp)	13kW (17hp)	15kW (20hp)

(G) Body

Monocogular construction.

High tensile steels.

Low weight.


(H) Rotor (underneath)

Dynamically balanced for smooth running.

(I) Compact design

Low profile.

Mounts close to tractor.

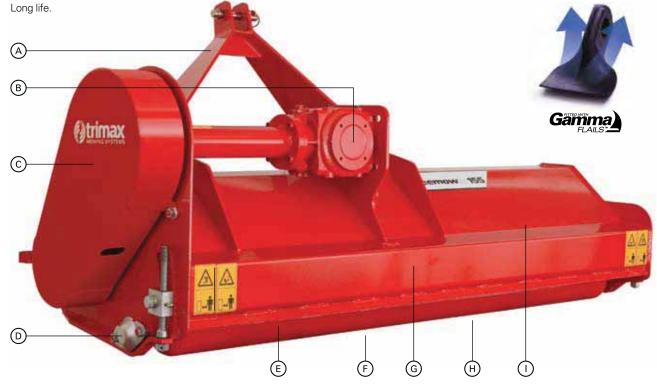

WARNING: Machinery shown in this publication may have protective guards removed for demonstration purposes. Trimax strongly recommends the use of safety guards and shields during normal operation to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by, or from contact with the cutting blades.





www.trimaxmowers.com

New Zealand /Australia

70 Maleme Street PO Box 2150, Tauranga 3041 New Zealand

phone: +64 7 541 0411 (SALES/ADMIN) phone: +64 7 543 1897 (PARTS) fax: +64 7 541 0412

email: sales@trimaxmowers.co.nz

United Kingdom

Unit 11B, Hill Farm Estate, Irthlingborough Road Little Addington, Kettering, Northamptonshire NN14 4AS, United Kingdom

phone: 01933 652235 (SALES/ADMIN) phone: 01933 652246 (PARTS) fax: 01933 652254

email: info@trimaxmowers.co.uk

Your nearest authorised dealer