



professional tractor powered mowing equipment

Warlord^{S2}

The Trimax Warlord has a proven history as a durable and resilient flail mower capable of performing in the most extreme environments and grass conditions.

The upgraded Warlord Series 2 comes with several new improvements, yet offers the same high performance finish, dependability and heavy-duty capabilities of its predecessor.



rugged dependability

...just add tractor!

Rear roller

The large diameter full width rear roller allows the mower to be run along kerbs and banks without scalping or blade strike. Domed ends minimise scuffing on turns and cutting height can be altered by adjusting the rear roller.



The WarlordS2 excels in long grass.



Your ideal roadside mowing partner.

Built to last with minimal maintenance

A double skinned heavy-duty body plus a robust three point linkage mounting frame shows that this mower means business. The high strength, heavy walled rotor and high capacity belt drive ensure longevity of the cutting system. Roller bearing protector caps come standard. All Trimax mowers are designed with ease of servicing as a key design parameter. The WarlordS2 is no exception. The fully opening rear flap provides unobstructed access for flail inspection and maintenance.

Power saving blades

One of the many secrets of the WarlordS2's success is the exclusive Trimax Gamma™ flail. Its straight cutting edge produces a perfectly even cut height with clippings finely chopped and dispersed behind the mower. The aerodynamic profile prevents clogging and energy wastage, yet generates sufficient draught to lift the grass for a clean cut with minimal horsepower. Choose from spring or cast steel types.



FITTED WITH
Gamma
FLAILS™

Shreds prunings up to 75mm (3") in diameter.

Discharge control

The rear discharge flap is another performance enhancing feature. By removing two bolts the entire rear of the body pan can be adjusted. Normal grass mowing is carried out with the flap in the intermediate positions, while rampant spring growth can be managed easily with the flap in the highest position. The WarlordS2 will shred fallen branches up to 75mm (3") in diameter with the coarseness of the mulch being controlled by the height of the rear flap. The finest mulch will be produced with the flap in its lowest position.



Specifications

The manufacturer has a policy of continuous improvement, therefore specifications may change without notice.


DESIGNED & MANUFACTURED IN
New Zealand

	W2 145	W2 175	W2 205	W2 235
Cutting Width	1.44m (57")	1.74m (69")	2.04m (81")	2.34m (93")
Overall Width	1.73m (68")	2.03m (81")	2.33m (93")	2.63m (104")
Minimum Power	26kW (35hp)	31kW (40hp)	35kW (45hp)	38kW (50hp)
Approximate Weight	480kg (1058lb)	530kg (1168lb)	620kg (1367lb)	670kg (1477lb)



FITTED WITH
Gamma
FLAILS™

- (A) Headstock**
Three point linkage.
Choose from offset or centre mounted options.
- (B) Gearbox**
Proven gearbox with two year warranty.
- (C) Rear flap**
Adjustable to control discharge and for the easiest possible flail servicing.
- (D) Belt drive**
High capacity belt drive for reliable power transmission.
Suitable for tractors up to 100hp.
- (E) Cutting height**
Large range of rear roller height adjustments.
- (F) Blades**
Trimax exclusive Gamma™ flails.
Aerodynamic, energy efficient design.
Ultra long life.
Y flails for rough cutting or shredding also available.
- (G) Rotor**
Large diameter.
Rigid rotor with balanced flail layout.
- (H) Flail lugs**
Heavy duty.
- (I) Internal liner**
Replaceable inner skin.
Threaded studs make replacement fast and easy.
- (J) Roller**
Domed roller ends minimise scuffing on turns.
- (K) Rotor bearings**
Tapered sleeve rotor bearings.

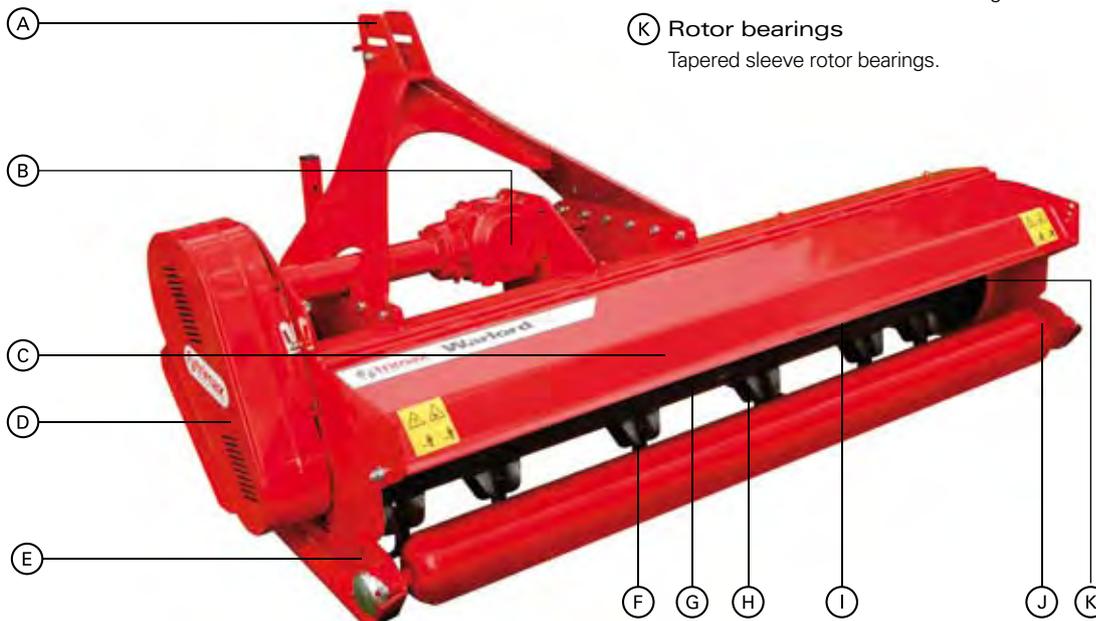

WARNING: Machinery shown in this publication may have protective guards removed for demonstration purposes. Trimax strongly recommends the use of safety guards and shields during normal operation to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by, or from contact with the cutting blades.

insist on Trimax
Genuine Parts



www.trimaxmowers.com

New Zealand /Australia

70 Maleme Street
PO Box 2150, Tauranga 3041
New Zealand

phone: +64 7 541 0411 (SALES/ADMIN)
phone: +64 7 543 1897 (PARTS)
fax: +64 7 541 0412

email: sales@trimaxmowers.co.nz

United Kingdom

Unit 11B, Hill Farm Estate, Irthlingborough Road
Little Addington, Kettering, Northamptonshire
NN14 4AS, United Kingdom

phone: 01933 652235 (SALES/ADMIN)
phone: 01933 652246 (PARTS)
fax: 01933 652254

email: info@trimaxmowers.co.uk

Your nearest authorised dealer:

